

Work Order ID 72271

Wednesday, July 20, 2011 3:18:03 PM



Page 1

Item ID: D3684-047

Accept



Setup Start



Revision ID:

Item Name: FWD LEG ASS'Y

Stop



Start Date: 7/20/2011 Start Qty: 2.00



Cust Item ID:

Required Date: 7/27/2011 Req'd Qty: 2.00



Customer:

Reference:

Approvals:

Process Plan:

WSE

Date: 11-07-20

Tooling:

Date:

Run Start



QC:

Date:

SPC (Y/N):

Date:

Stop



Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
--------------------------------	--------------------------	----------------------	---------	--------	--------------	---------------	---------------	------------------	----------------

Draw Nbr

Revision Nbr

D3684

Rev D

100

Pick Kit

0.00



Packaging

Memo

0.00

Packaging

110

Small Fab

0.00



Small Fab

Memo

0.00

Small Fab

1-Use anti-seize compound Teetly 502c Class 1,Mil-PRF-16173E or equivalent on thread and assemble as per dwg D3684

1111791

2-Assemble D3693-1 & D3691-1 Using Sikaflex -241/-291 between mating surfaces as per Dwg D3684

1119508

**Ensure holes for AN3C Bolts are free of sealant.
Torque Fastners as per Dwg D3684

②

FF

12-04-03

Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

* **NOTE:** Date & initial all entries

Work Order ID 72271

Wednesday, July 20, 2011 3:18:03 PM



Page 2

Item ID: D3684-047

Accept



Setup Start



Revision ID:

Stop



Item Name: FWD LEG ASS'Y

Start Date: 7/20/2011 Start Qty: 2.00



Cust Item ID:

Required Date: 7/27/2011 Req'd Qty: 2.00



Customer:

Reference:

Approvals:

Process Plan:

Date:

Tooling:

Date:

Run Start



QC:

Date:

SPC (Y/N):

Date:

Stop

Sequence ID/
Work Center IDOperation
DescriptionSet Up/
Run Hours

Tool ID

Tool #

Plan
CodeAccept
QtyReject
QtyReject
NumberInsp.
Stamp

120

QC5- Inspect part completeness to step on W/O

0.00



QC

Memo

0.00

8/17/11

12

Quality Control

130

Identify as per dwg & Stock Location 200

0.00



Packaging

Memo

0.00

12/4/11

20

Packaging

140

QC21- Final Inspection - Work Order Release

0.00



QC

Memo

0.00

12/4/11

Quality Control

012-04-5

Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Picklist Print

Wednesday, July 20, 2011 3:17:59 PM

Page 1

Work Order ID: 72271

Parent Item: D3684-047

Parent Item Name: FWD LEG ASS'Y



Start Date: 7/20/2011

Required Date: 7/27/2011

Start Qty: 2.00

Required Qty: 2.00

Comments: IPP Rev:A new issue 08-02-12 DD verified by:JLM
 IPP Rev:B As per Rev B 09-01-07 JLM Verified By:EC IPP
 REV:C AS PER REV D 10-03-16 JLM VERIFIED BY:EC
 IPP Rev:C Added sealant note as per Rev C 09-01-20 JLM Verified By:DD

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
AN3C12A Bolts		Purchased	No			110	Each	9.0000	2	4			
				<u>Location</u> 120449									
				ST351 120423				9		3			
				117514				4					
				118112				5					
D3688-1 STUD		Manufactured	No			110	Each	0.0000	1	2			
D3689-1 SLEEVE		Manufactured	No			110	Each	4.0000	1	2			
				<u>Location</u> 80362									
				GA 70858				4		2			
								4					
D3691-1 STUD		Manufactured	No			110	Each	10.0000	1	2			
				<u>Location</u> 80363									
				GA 62181				10		2			
								10					

② FF 12-04-03

② FF 12-04-03

② FF 12-04-03

② FF 12-04-03

Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Picklist Print

Wednesday, July 20, 2011 3:17:59 PM

Page 2

Work Order ID: 72271

Parent Item: D3684-047

Parent Item Name: FWD LEG ASS'Y

Start Date: 7/20/2011

Required Date: 7/27/2011

Start Qty: 2.00

Required Qty: 2.00

D3692-1
SPACER

Manufactured No

110 Each

99.0000

4 8



② FF 12-04-03

Location

Loc Qty

Loc Code

ST075 73232
51467

99
99

8

D3693-1
Rod End Bearing

Manufactured No

110 Each

8.0000

1 2



② FF 12-04-03

Location

Loc Qty

Loc Code

GA 80275
50734

8
8

2

MS21043-3
Nut

Purchased No

110 Each

724.0000

2 4



② FF 12-04-03

Location

Loc Qty

Loc Code

FG 110614
103691
ST301 112314
118077

72
72
652
9
643

4

NAS509-12C
Nuts

Purchased No

110 Each

14.0000

1 2



② FF 12-04-03

Location

Loc Qty

Loc Code

ST280 120422
112453

14
14

2

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Picklist Print

Wednesday, July 20, 2011 3:18:00 PM

Page 3

Work Order ID: 72271



Parent Item: D3684-047



Parent Item Name: FWD LEG ASS'Y

Start Date: 7/20/2011

Required Date: 7/27/2011

Start Qty: 2.00

Required Qty: 2.00

NAS509L12C

Purchased

No

110

Each

19.0000

1

2



② FF12-04-03

Nuts

Location

Loc Qty

Loc Code

ST280

120632

19

112314

9

112828

10

2

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries


ITEM	QTY -041	PART NUMBER	DESCRIPTION
1	X	D3684-041	TRIPOD MOUNT ASSEMBLY
2	1	D3684-043	MOUNT ASSEMBLY
3	1	D3684-045	INBOARD LEG ASSEMBLY
4	4	D3692-1	SPACER
5	2	AN3C-12A	BOLT
6	2	MS21043-3	NUT

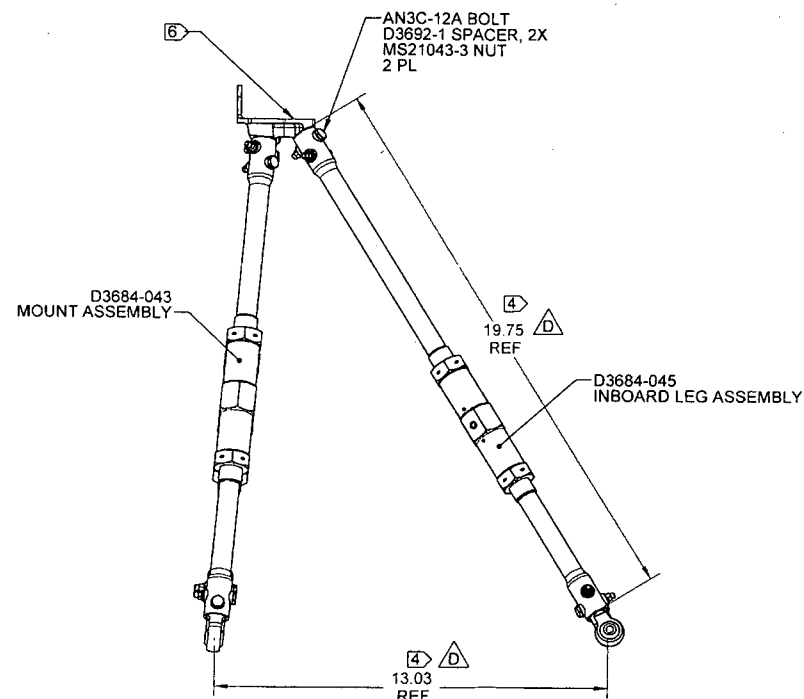

D3684-041 TRIPOD MOUNT ASSY 7

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/-3/-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 9.9 lbs
- 6) ASSEMBLE D3684-045 WITH D3684-043 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT
- 7) ASSEMBLY SHOWN FOR REF ONLY, -041 IS PACKAGED UNASSEMBLED

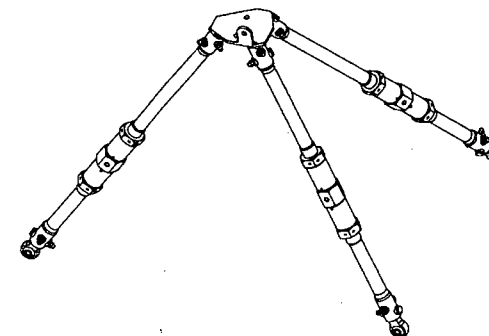

70271

RELEASED
2010-03-15
JWP

D	13.03 WAS 13.10 (ZN B5-1); 19.75 WAS 19.87 (ZN C4-1); 19.40 WAS 19.52 (ZN C6-2); 17.15 WAS 17.27 (ZN C4-2); 19.85 WAS 20.24 (ZN B5-2); 20.98 WAS 21.09 (ZN C5-3); 20.62 WAS 20.74 (ZN C5-4); 18.37 WAS 18.49 (ZN C6-5)	RF	10.03.03
C	NOW ASSEMBLED USING SEALANT (ZN A8-1, D6-1, A8-2, D4-2, A8-3, B4-3, A8-4, B4-4, A8-5, B5-5); ASSEMBLY NOW SHOWN FOR REF ONLY (ZN A8-1, A4-1)	RF	08.12.15
B	19.52 WAS 19.50 (ZN C6-2); 9.20 WAS 9.70 (ZN C6-2); 20.74 WAS 21.24 (ZN C5-4); 6.95 WAS 6.88 (ZND5-5); MODIFIED PER PROTOTYPE INSTALLATION; REFORMATTED TO CURRENT DWG STANDARDS	RF	08.11.24
A	NEW ISSUE	RF	08.05.22
REV.	DESCRIPTION	BY	DATE
DESIGN	RF		
DRAWN	RF		
CHECKED	#		
MFG. APPR.	#		
APPROVED	#		
DE APPR.	#		
DATE	10.03.03		

DART AEROSPACE LTD
HAWKESBURY, ONTARIO, CANADA

DRAWING NO.
D3684

REV. D

SHEET 1 OF 5

TITLE
TRIPOD MOUNT ASSY

SCALE

NTS

COPYRIGHT © 2008 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD

Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector



Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

ITEM	QTY -043	PART NUMBER	DESCRIPTION
1	X	D3684-043	MOUNT ASSEMBLY
2	1	D3687-1	MOUNT
3	1	D3684-047	FWD LEG ASSY
4	1	D3684-049	AFT LEG ASSY
5	8	D3692-1	SPACER
6	4	AN3C-12A	BOLT
7	4	MS21043-3	NUT

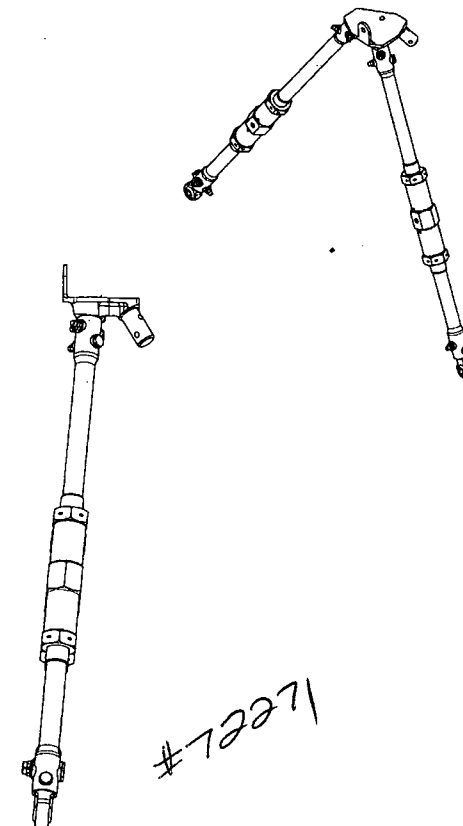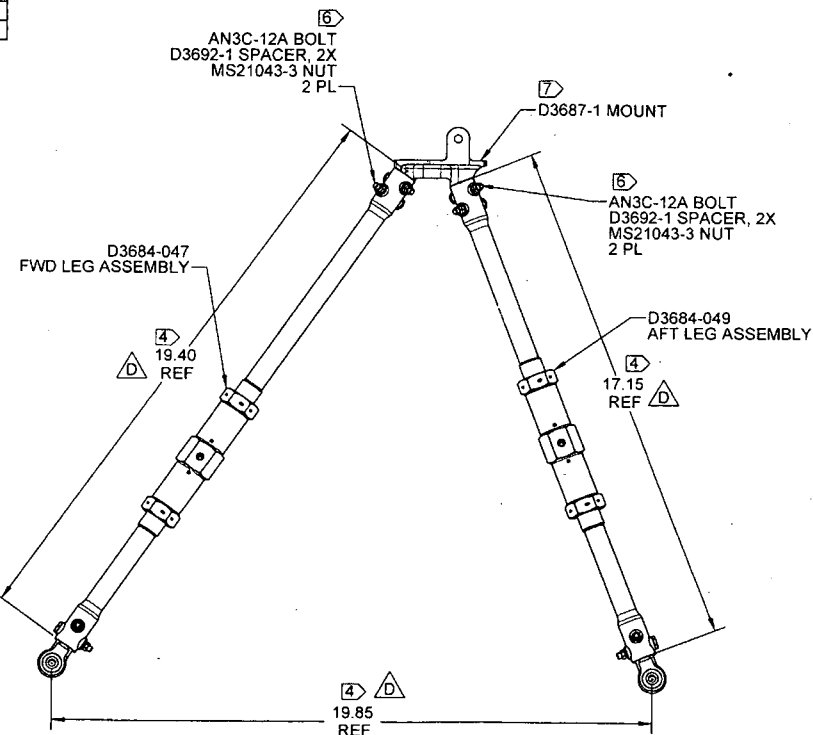

#72271

RELEASED
2010-03-15

D3684-043 MOUNT ASSEMBLY

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-043 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 8.6 lbs
- 6) TORQUE FASTENERS TO 20-25 in-lbs
- 7) ASSEMBLE D3684-047 & D3684-049 WITH D3687-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESSBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		D3684	SHEET 2 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	<small>COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD</small>	

Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

ITEM	QTY -045	PART NUMBER	DESCRIPTION
1	X	D3684-045	INBOARD LEG ASSEMBLY
2	1	D3688-5	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

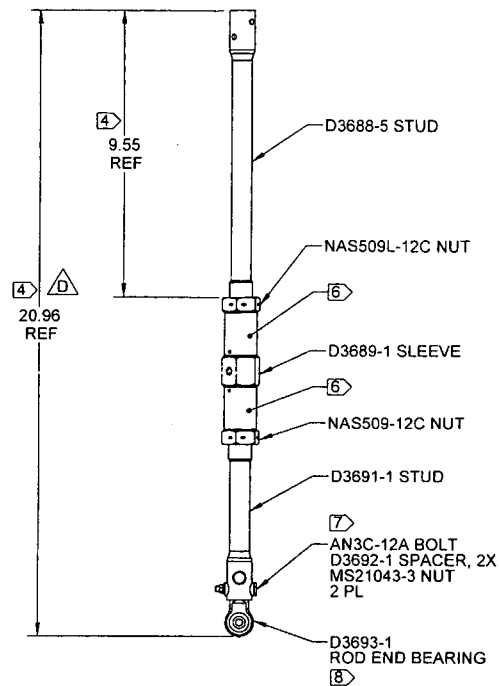




D3684-045 INBOARD LEG ASSEMBLY

#72271

RELEASED
2010-03-15

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-045 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSION SHOWN IS WHEN D3688-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.1 lbs
- 6) USE TECTYL 502C CLASS 1, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		D3684	SHEET 3 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	COPYRIGHT © 2008 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

ITEM	QTY -047	PART NUMBER	DESCRIPTION
1	X	D3684-047	FWD LEG ASSEMBLY
2	1	D3688-1	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

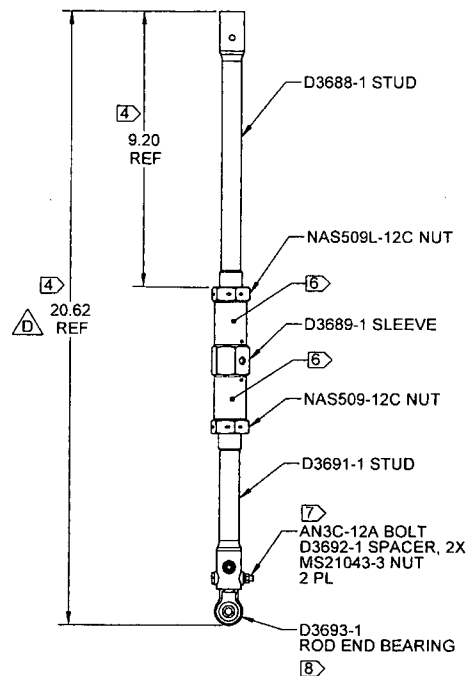

D3684-047 FWD LEG ASSEMBLY

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-1 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.09 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3692-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED	<i>[Signature]</i>	DRAWING NO. D3684	REV. D
MFG. APPR.	<i>[Signature]</i>	SHEET 4 OF 5	
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	TRIPOD MOUNT ASSY	
DATE	10.03.03	NTS	

COPYRIGHT © 2003 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT
WRITTEN PERMISSION FROM DART AEROSPACE LTD.

RELEASED
2010-03-15

Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

ITEM	QTY -049	PART NUMBER	DESCRIPTION
1	X	D3684-049	AFT LEG ASSEMBLY
2	1	D3688-3	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

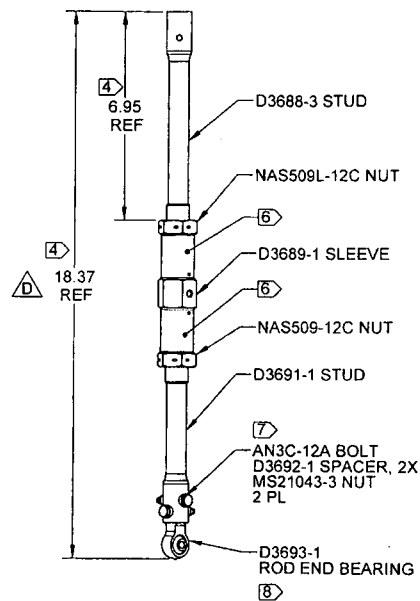





D3684-049 AFT LEG ASSEMBLY

#72271

RELEASED
2010-03-15

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 2.86 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in.-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		D3684	SHEET 5 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	COPYRIGHT © 2008 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSES OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD			

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries